

Partie 5:

charger

1-gemstone->browse->all class ->GBWCar->compile in ST->yes

2-system->Load parcels Named->

browse->parcel

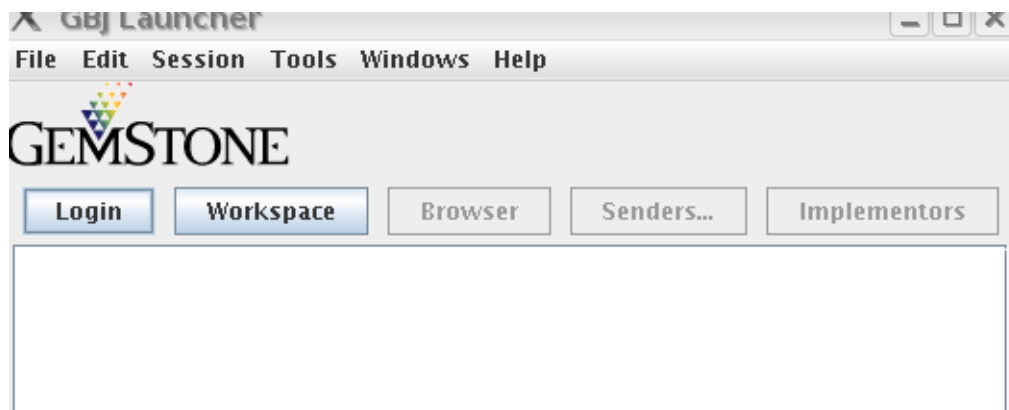
QUESTION 2

-gemstone->browse->all class ->GBWCar->compile in ST->yes

classVar-> add-> class var : Agenda

export CLASSPATH=\$VISUALWORKS/GBJ22/gbj22.jar

java com.gemstone.tools.GbjLauncher

The screenshot shows the 'Gemstone Login' dialog box. It contains several input fields and options for configuring the connection to a Gemstone server. The fields are organized into sections: GemBroker Machine, GemBroker Port, Gemstone Server, Gemstone User, Gemstone Password, Gem Service, Host User, Host Password, Transaction Mode, TimeOut, Connect Timeout, and GS Format. The 'Auto' radio button for Transaction Mode is selected. The 'Ok' and 'Cancel' buttons are at the bottom.

GemBroker Machine	localhost
GemBroker Port	9090
Gemstone Server	!@handellgemserver61
Gemstone User	sio11
Gemstone Password	*****
Gem Service	gemnetobject
Host User	
Host Password	
Transaction Mode	<input type="radio"/> Manual <input checked="" type="radio"/> Auto
TimeOut	900
Connect Timeout	150
GS Format	<input checked="" type="radio"/> 32 <input type="radio"/> 64.1 <input type="radio"/> 64.2
<input type="button" value="Ok"/> <input type="button" value="Cancel"/>	